


# LED Power Supply 12V DC SLIM 60W



## Features and Benefits

- Smaller dimensions to better fit in low profile signs
- ½" NPT threaded connector on AC side to simplify electrical wiring
- Wide input AC voltage range 100-277V 50/60Hz
- Active Power Factor Correction (0.96 Typical)
- Operating temperature -40°C to +60°C (-40°F to +140°F)
- Surge, over-voltage, over-current, over-temperature and short-circuit protections
- IP67 Rating - UL certified for use in wet, damp and dry locations
- Compliant with FCC Title 47 CFR Part 15, ANSI C63.4: 2009 Class B
- 5-year limited warranty



## Ordering Information (subject to change without notice)

Ordering Code	Input Voltage (VAC) <sup>1</sup>	Output Voltage (VDC) <sup>2</sup>	Max. Output Current (A)	Max. Output Power (W)	Typical Efficiency <sup>3</sup>	Typical Power Factor		Max Inrush Current <sup>4</sup> (A)	Nom. Input Current (AAC)	Average Rated Life <sup>5</sup> (hours)	IP Rating	Net Weight (lb)/(kg)
						100VAC	220VAC					
PS12-60WSL-100-277V	100-277	12	5.00	60	83%	0.96	0.95	60	0.63	50,000	IP67	1.54/0.70

- Notes:**
- (1) LED Power Supply will also accept 220V DC Input Voltage
  - (2) Tolerance ± 0.6V
  - (3) Measured at full load and 220V AC input.
  - (4) Measured at 220V AC input and 25°C cold start
  - (5) For case temperature ≤70°C ;  
Case temperature shall not exceed 90°C in application.

## LED Module to Power Supply Wire Size

Gauge (AWG)	Wire Size		Maximum Distance*	
	Metric (mm <sup>2</sup> )	Feet	Meters	
26	0.13	3	0.9	
24	0.21	4	1.2	
22	0.33	7	2.1	
20	0.52	11	3.4	
18	0.82	18	5.5	
16	1.31	29	8.8	
14	2.08	45	13.7	
12	3.31	71	21.6	
10	5.26	120	36.6	

\*Distance from power supply to load at full capacity


## Ordering Guide

PS	12	-60W	SL	-100-277V
Power Supply	Output Voltage	Output Wattage	Slim Housing	Input Voltage Range

Safety Category	Country	Standard
ULcUL	USA & Canada	UL8750 Compliance to UL1310 Class2, UL1012 CSA-C22.2 No. 107.1, CSA-C22.2 No. 223-M91 Class2
CE	Europe	EN61347- 1, EN61347- 2-13:2006, EN62384:2006
<b>EMI Standards</b>		<b>Notes</b>
EN 55015		Conducted emission Test & Radiated emission Test with 6 dB margin
EN 61000-3-2		Harmonic current emissions: Class C
EN 61000-3-3		Voltage fluctuations & flicker
EN 61000-4-2		Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3		Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4		Electrical Fast Transient / Burst-EFT
EN 61000-4-5		Surge Immunity Test: AC Power Line: line to line 2 kV, line to earth 4 kV
EN 61000-4-6		Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8		Power Frequency Magnetic Field Test
EN 61000-4-11		Voltage Dips
EN 61547		Electromagnetic Immunity Requirements Applies to Lighting Equipment



# LED Power Supply 12V DC SLIM 60W

## Mechanical Outline

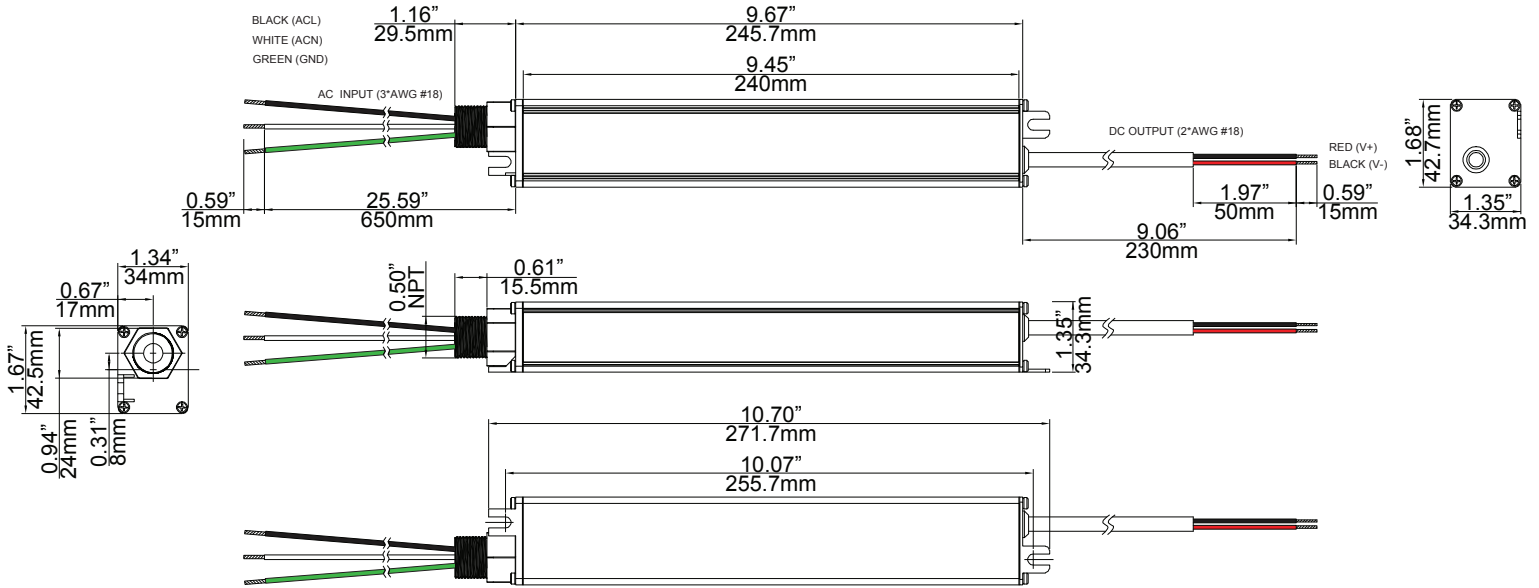

Note: UL 48 Standard requires spacings between transformers, ballasts, neon power supplies and LED power supplies shall be at least 1 inch (25.4 mm) from end to end and 4 inches (101.6 mm) from side to side.

## Derating Curve

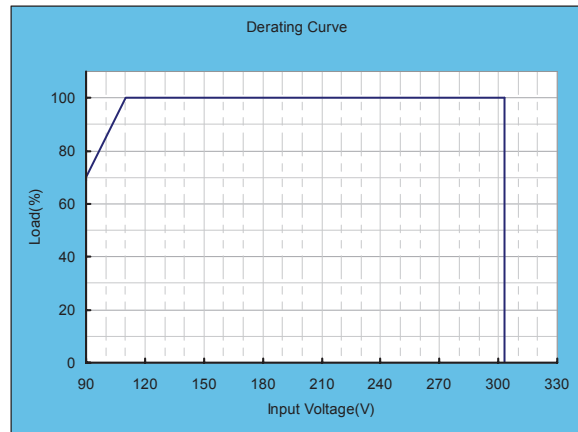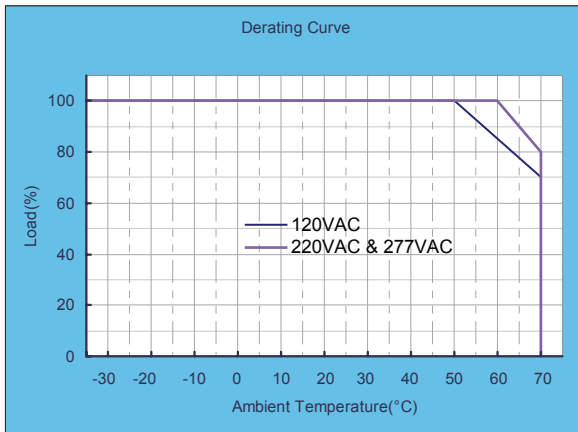

**General LED, Inc.**  
 1074 Arion Circle, Ste 116  
 San Antonio, TX 78216  
 United States of America  
 +1.866.482.0203  
[www.AgiLight.com](http://www.AgiLight.com)  
[www.GenLEDLighting.com](http://www.GenLEDLighting.com)  
[www.GeneralLED.com](http://www.GeneralLED.com)

**General LED Fze**  
 822, Building 4EA  
 Dubai Airport Free Zone  
 Dubai, United Arab Emirates  
 +971 4 7017901822



1. The maximum case temperature shall not exceed 90°C when used in end product.
2. These products are intended to be connected to a max. 20 A branch circuit.
3. These products are intended for use in dry, damp and wet locations.