



## Applications


- Channel letters
- Box signs
- Cove lighting
- Applications starting at 4" | 100 mm depth



## Ordering Information

Part Number	White Color Temperature	Module Spacing (mm)	Number of Modules		Nominal Light Output (lm) *		
			Per Foot	Per Meter	Per Module	Per Foot	Per Meter
LS-U650-71K-B200-A	7100K	200	1.5	5	100	150	500
LS-U650-65K-B200-A	6500K	200	1.5	5	100	150	500
LS-U650-57K-B200-A	5700K	200	1.5	5	100	150	500
LS-U650-50K-B200-A	5000K	200	1.5	5	100	150	500
LS-U650-45K-B200-A	4500K	200	1.5	5	92	138	460
LS-U650-40K-B200-A	4000K	200	1.5	5	92	138	460
LS-U650-30K-B200-A	3000K	200	1.5	5	85	128	425
LS-U650-27K-B200-A	2700K	200	1.5	5	85	128	425

\* ±10%





## Product Ratings

Luminous Efficacy	128 lm/W @ 6500K
Wattage per Module	0.78 W Nominal 0.82 W Maximum
Input Voltage	12 V DC
Input Current	0.065 A/ module
Power Supply Loading	70 modules per 60W
Ingress Protection	IP68
Operating Temperature	-40°F to +140°F (-40°C to +60°C)
L70 Life time @ 60°C	50,000 hours
Warranty	9 Year Standard Warranty

## Luminous Intensity Distribution

600 Series Batwing Beam Pattern

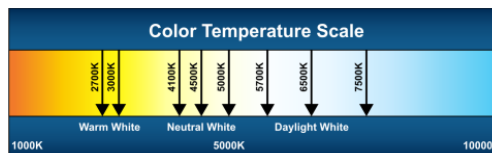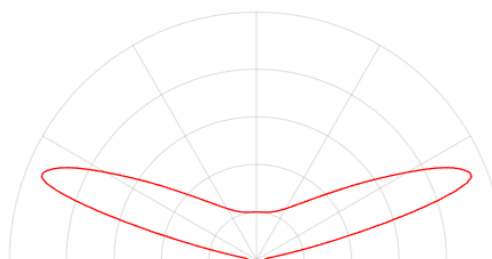

## Shipping Information

Module Type	Packaging Quantity			Carton Weight	Box Dimensions			Carton Dimensions			Inch mm
	Per Bag	Per Box	Per Carton		W	D	H	W	D	H	
LS-U650-xxx-B200-A	100	500	2000	Modules Feet Meters	46.1 lb 20.9 kg	22.1 560	10.6 270	4.5 115	31.0 788	23.1 588	9.9 252
	65.6	328.1	1312.3								
	20	100	400								

## Layout Guide\*

Channel Depth (inch)	Single Row		Multiple Rows		Channel Depth (mm)	Single Row		Multiple Rows	
	Max. Stroke	Module Spacing	Row Spacing	Module Spacing		Max. Stroke	Module Spacing	Row Spacing	Module Spacing
3	10	6.5	6.5	6.5	75	250	165	165	165
4	13	7.87	9	7.87	100	330	200	225	200
5	17	7.87	13	7.87	125	430	200	330	200
6	17	7.87	16	7.87	150	430	200	405	200
7	15	7.87	15	7.87	175	380	200	380	200


\*Density guide designed to maintain a minimum of 600 lux for a single row or 800 lux for multiple rows at sign face (7328 white).

## Power Supply Loading

	Module Type	LS-U650-xxx-B200-A			
		Power Supply	Max. # of Modules Per Continuous String	Total # of Modules Per Power Supply	Total # of Feet
UL CLASS 2	12 W	14	14	9.2	2.8
	15 W	17	17	11.2	3.4
	35 W	40	41	26.9	8.2
	60 W	67	70	45.9	14
	180 W*	67	210	137.7	42
UL CLASS 1	100 W	67	115	75.5	23
	150 W	67	173	113.5	34.6
	180 W	67	207	135.8	41.4
	220 W	67	253	166	50.6

Note 1. The number of modules in each of the parallel strings should not exceed the specified maximum.  
 2. \*3 – 60 Watt Channels

## Dimensions

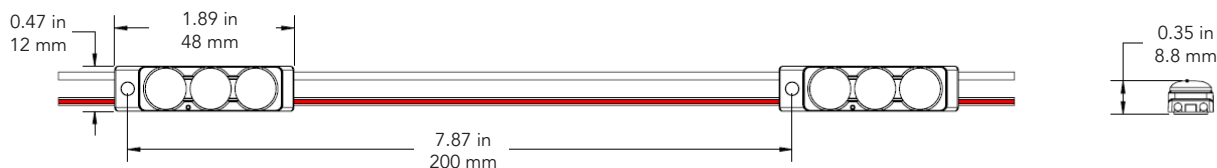

### CAUTIONS

1. UL ONLY - These products are only suitable for connection to a UL rated Class 2 power source rated 12 Volt or less.
2. UL ONLY - These products are intended for use only when connected to a power source that complies with UL rated Class 2 voltage and energy limited circuit.
3. UL ONLY -When these units are connected to a UL rated Class 2 circuit, they are not to draw a total wattage of greater than the secondary or output rating of the UL rated Class 2 power supply.
4. These products may be secured in place in the end product by any means available.
5. These products are suitable for use in dry, damp, and wet locations. Not suitable for submersed applications.